



# PW-100

Fully-automated high-speed  
vegetable flow wrapper



*Searching for a New Balance*

# Advanced length-sensing technology for accurate and speedy packing

The PW-100 is a fully-automated high-speed vegetable flow wrapper that is especially suited for packing elongated and leafy vegetables. Advanced length-sensing technology ensures accurate and speedy packing. This product has a number of features that reduce packing errors and locks in freshness for a shelf-ready product.

## PW-100 – Speedy and uniform wrapping

This flow wrapper excels at packing vegetables, such as elongated and leafy varieties. It protects the product from being damaged, giving you a fresh, long lasting and presentable product for your customers.

## Ideal for elongated and leafy vegetables

PW-100 uses advanced length-sensing technology for accurate and speedy packaging. Use to pack elongated and leafy vegetables, root vegetables, and fruits at speeds of 10-60 packages per minute, and 26 meters of film per minute.

## Advanced length-sensing & anti-pinch technology

Auto-length measuring ensures that items fit comfortably in the package, and an anti-pinch feature prevents leafy ends from being sealed. Cutting protection also keeps packed produce from being cut, assuring consistent packing quality. This feature also allows for mixed items to be packed in one line.

## The reliability is in the hardware

Because packing is all about quality, our machinery employs technology such as double pinching roll heating and a reciprocating cutter, and large hole punch jigs which allows the produce to breathe and stay fresh.



## Specifications

Type	PW-100B	PW-100P
Film Material	BOPP	POF
Structure	Reciprocating	
Packing Speed	10-60PPM	10-50PPM
Max Packing Size	H: 130 mm	
	W: 280 mm	W: 210 mm
Max Film Size	W: 580 mm	W: 450 mm
	Φ: 330 mm	
Max Packing Speed	26m/min	20m/min
Cutting Length Range	180-900mm	
Dimension (mm)	5062(L)*1000(W)*1530(H)	
Power Consumption	5.0kW	
Power Supply	AC220V 50/60Hz	

## Options



### TSM-63 Shrink Tunnel Machine

(Only available for PW-100P)



The shrink tunnel uses heat shrinkable film that fits to the shape of the produce for enhanced presentation

Dimension: 2850 (L) x 540 (W) x 1400 (H)

Speed: 9 - 21 (m/min)

Shrinkage size: H: 130 (mm) W: 300 (mm)

## Dimensions (mm)

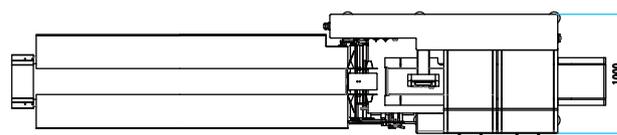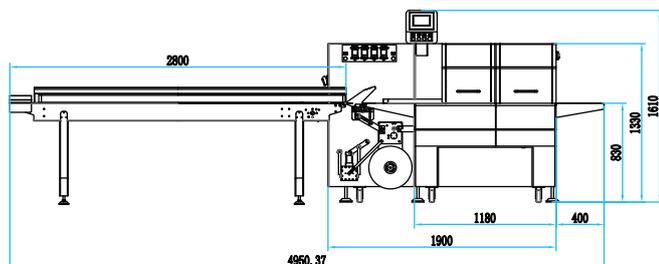

\*Specifications are subject to change without prior notice.

## SHANGHAI TERAOKA ELECTRONIC Co., Ltd.

Ting Lin Industrial Zone, Jin Shan District Shanghai 201505 China  
 Tel: 86-21-57234888  
 Fax: 86-21-57234090  
 Website: www.digisystem.com.cn